

SHENZHEN HELILAI TECHNOLOGY CO., LTD.

P2.5 Indoor LED Module

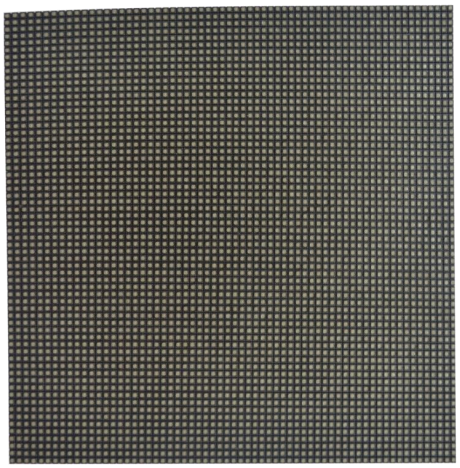

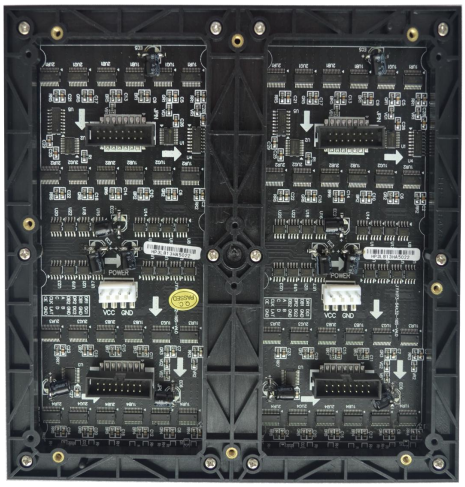

Specification			
Size:160mm×160mm			
LED color:1R1G1B 3in1 led 2121			
Module Power Consumption 6A / 30W			
Constant Current Drive:1/32 Scan IC SM16016/MBI5124			
RLED Epistar{350-400CD} Wavelength625±2nm			
GLED Epistar{650--750CD} Wavelength520±2nm			
BLED Epistar{200--300CD} Wavelength470±2nm			
Weight0.24kg			
Module Thickness 1.5CM			
Brightness 1500CD			
Module Pixel 64×64=4096 Dot Pixel 2.5mm			
LEDAngle Horizontal≥140° Vertical≥140°			
Connector: HUB75			
Color Ratio: R:G:B/3:6:1			
Warranty	Use Life 100000Hrs		
	Warranty 1 Year		
Screen Parameter	Brightness, automatic adjust by sensors		
	Continuous working time≥48hrs		
	Dot/sqm	160000	
	Best view distance 2.5m--50m		
	Average Power consumption 550W/㎡		
	ValtageAC220V±10%		
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION		
Packing			
Power cable 45CM by 2			Flat cable 20CM
Carton Size 36.5*34.8*35.5			Volume 0.08CBM
Weight 18.50kg			QTY/CTN 64PCS/CTN
			39.1PCS/SQM